
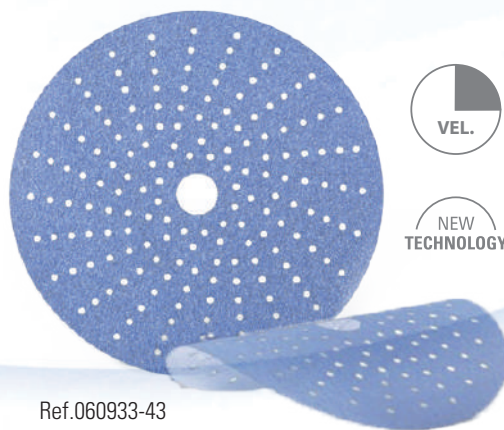


# URAX CERAMIC

## CERAMIC DISCS FOR PERFECT SANDING CERAMIC GRAIN DISC ON FILM BACKING

Ref. / Code / Rif.	Ø	Grano / Grain / Grana
060933	 150 mm	P-80
060934		P-100
060935		P-120
060936		P-150
060937		P-180
060938		P-220
060939		P-240
060940		P-320
060941		P-400
060942		P-600
060943		P-800



Ref.060933-43


Choose the **urax ceramic** grit that best suits the needs of the stage of the sanding job.

Recommended for use with orbital sanders. **The urax ceramic** discs attach perfectly to the sander by means of vel.

With uniform mineral coating on perfectly even surface, film works better than paper.


Our extensive range of highly durable, high strength ceramic grit disc for surface sanding.

New multi-hole pattern allows continuous sanding without dulling of the disc.

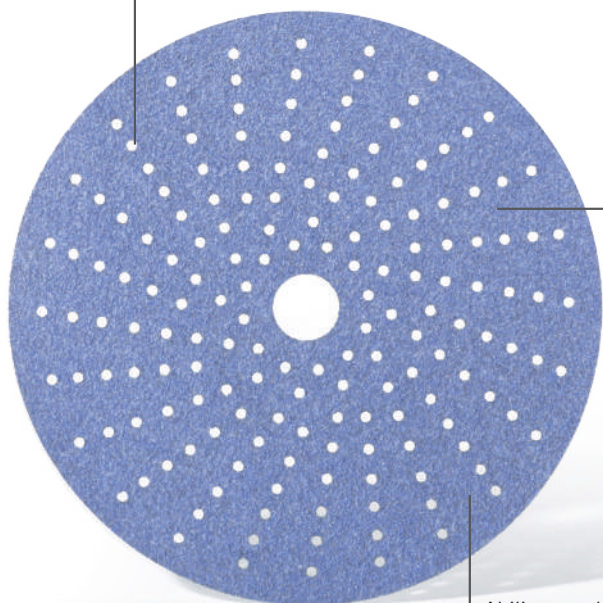

Ceramic grits that stay sharp for a longer time.

Ability to self-sharpen.

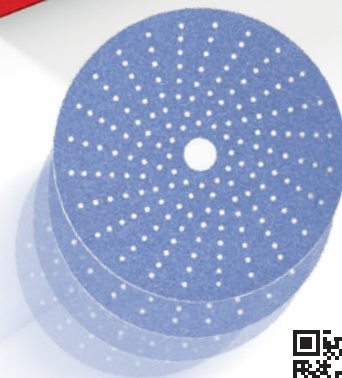

# BARNIZ Y CATALIZADOR HSA

THE BEST WAY TO MAKE IT **SHINE**



Ref. 010014



Ref. 010015



100gr / 51,5gr

30' - Normal

18-20"

1,2mm

50-60my

5-7 min

40' - Air  
10' - 60°C

5'

60'

The HSA clear coat has been formulated for both water and solvent based bi-coat systems in spot repairs. A hardener with air drying to be used together with the HSA Clear coat.

It is noted for its excellent aspect and curing speed, with the car ready 40 minutes after the application and no need of heat in the spray booth, which can generate very significant savings in the painting cycle and an increase of the productivity.

The drying time in spray booth could be 10 minutes 60°C or 20 minutes 40°C. The drying time using an IR is only 5 minutes. The HSA clear coat can be polished in 60 minutes approx. Excellent UV, scratches and chemical agents resistance.

Clear coat HSA is compliant with the European Norm 2004/42/CE, with a lower VOC Content than conventional clears.

